

3-Way Knuckle Joint Connector

Rod & Joint

Easily build adjustable bistro style shelving units with this brass 3-way knuckle joint connector.



Durable brass with sleek styling.

Standard Finishes



Brushed Brass

Custom finishing is available upon request.



Easy to align, simple to secure.

Dimensions

| | | |
|-------------------|--------------|-------|
| (H) | Height | 2.76" |
| (D ₁) | Diameter 1 | 0.98" |
| (D ₂) | Diameter 2 | 0.63" |
| (CP) | Center Point | 2.03" |
| (I) | Inset | 0.79" |

Included Hardware


| | |
|-----|------------------|
| (2) | #10-32 set screw |
|-----|------------------|

Installation

1. Attach the knuckle joint to the first rod and tighten set screw.
2. Slide the second rod into the knuckle joint and tighten set screw.

Care and maintenance varies by finish. Given the nature of the product, typical wear and tear may be noticed with your shelving over time, such as scuffs, scratches, and dirt.

Visit [Kegworks.com/care-guide](https://www.kegworks.com/care-guide) to read our guide on how to properly prep, clean, and maintain all of our metal finishes.

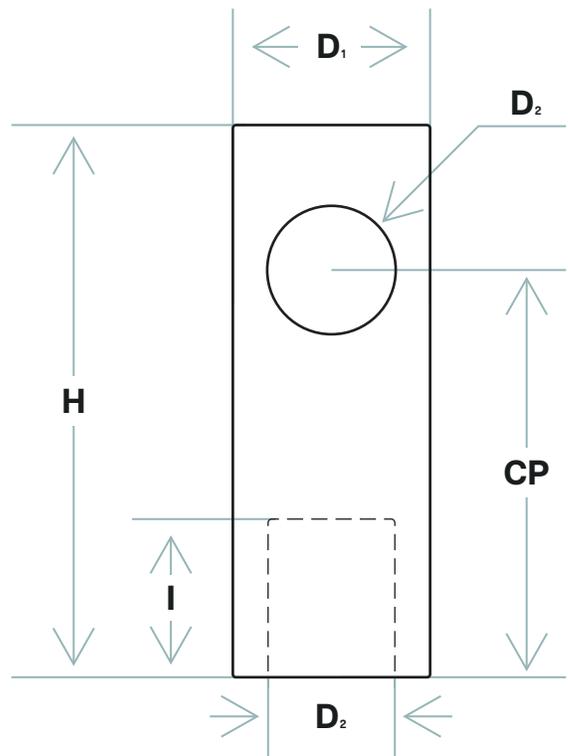

Complete The System

Make sure to get all the necessary components to complete your shelving system.

